# **Armstrong**Flooring\*


## **Natural Creations**<sup>™</sup>


6.00mm Luxury Hybrid Rigid Core



# Armstrong Flooring's Natural Creations Luxury Hybrid Rigid Core Flooring combines durability with trending designs.

Our Luxury Hybrid Rigid Core flooring is a great choice for people who want flooring that looks as realistic as possible while providing protection from the challenges that floors face daily.

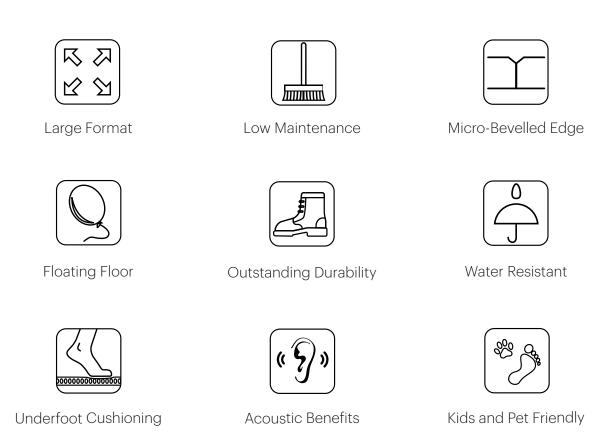

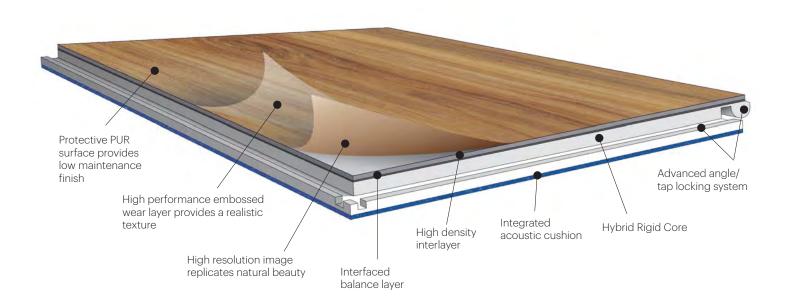

6.0 x 223 x 1492mm

**QUICK SHIP** Australian Stocked Range







VALLEY OAK - HAZE 1R109508



VALLEY OAK - MIST 1R109505

6.0 x 223 x 1492mm

**QUICK SHIP** Australian Stocked Range



OAK - TRANQUIL 1R057014



OAK – HARMONY 1R057015



OAK - MOODY 1R057009



OAK – DEBONAIR 1R116406

6.0 x 223 x 1492mm

**QUICK SHIP** Australian Stocked Range



RIVERLAND - ASH 1R111903



RIVERLAND - SMOKE 1R111906



RIVERLAND - LIMED 1R111907



RIVERLAND – NATURAL IR111802

6.0 x 223 x 1492mm

**QUICK SHIP** Australian Stocked Range



WILDWOOD - TAWNY 1R058007



WILDWOOD - GOLDEN 1R172211



IRONBARK - RUSTIC 1R105207



BARNWOOD – OMBRE IR102605



# **Armstrong**Flooring

TECHNICAL DATA		Natural Creations Luxury Hybrid Rigid Core
Type of floor covering	EN ISO 10582	Luxury Hybrid Rigid Core
Manufactured		China
Overall Thickness	ISO 24346	6.0mm
Wear Layer	ISO 24346	0.55mm
Size	ISO 24342	223 x 1492mm
m²/carton		1.99
Kg/m <sup>2</sup>	ISO 23997	9.75
Wear Layer Type	ISO 24340	Type I
Wear Resistance	EN660-2	Group T
Polyurethane Reinforced		Yes PUR
Squareness and straightness	EN ISO 24342	Deviation allowed at any point for side length
≤ 400mm		≤ 0.25mm PASS
> 400mm		≤ 0.35mm PASS
Dimensional Stability	ISO 23999	≤ 0.25% (PASS)
Residual Indentation	ISO 24343-1	≤ 0.1mm (PASS)
Castor Chair	ISO 4918	PASS
Acoustic Properties	ISO 717-2	L <sub>n,w</sub> = 39dB (NCC:2019 Vol-1 FV5.1(b) PASS = Ln,w ≤ 62)
Impact Noise Reduction (Tested on 200mm Concrete Slab)	ISO10140	Δ Lw = 20 dB
Fire Resistance	ISO 9239-1	
Critical Radiant Flux		≥ 8kW/m² (PASS)
Smoke Development Rate		<750%.min (PASS)
Classification (Use Area)	EN ISO 10874	Domestic Heavy: 23. Commercial Heavy: 33
		Industrial General: 42
Slip Resistance	AS 4586: 2013 (2004)	
Surface Embossing		EC-C
Wet Pendulum		P3
Oil - Wet		R10

**NOTE:** Surface Embossing – each different surface emboss/texture is tested separately for slip resistance characteristics, refer to third party certificates for details.

#### **Contact:**

#### **Armstrong Flooring Pty Ltd**

29 – 39 Mills Road, Braeside, 3195 Victoria Australia
For further information and samples:
Australia Freecall 1800 632 624
Email customer\_services@armstrongflooring.com or
visit us on the web

www.armstrongflooring.com.au