

Inspiring
Great
Spaces™

Armstrong®
FLOORING



ACCOLADE PLUS
ACCOLADE FOOTHOLD
ACCOLADE SAFE
WALLFLEX

COMMERCIAL FLOORING & WALLING
HOMOGENEOUS VINYL SHEET

ACCOLADE PLUS

(2mm x 1.83m x 16m)



SLIP RESISTANCE



SPICE WHITE
LRV: 69.04

5A503561



CAPPUCCINO
LRV: 44.19

5A503571




IRONBARK
LRV: 22.98

5A503611



WHITEHAVEN
LRV: 63.83

5A503771

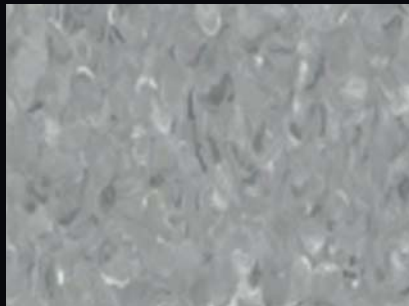

DARLING GREY
LRV: 36.05

5A503721



HAY PLAINS
LRV: 24.68

5A503921



CEDUNA WHITE
LRV: 64.61

5A503011



MURRAY CLAY
LRV: 30.19

5A503711



SAND GREY
LRV: 26.34

5A503151



CAMDEN GREY
LRV: 39.56

5A503941



MINTARO SLATE
LRV: 23.37

5A503931



BLACK OPAL
LRV: 15.98

5A503621

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

ACCOLADE PLUS

(2mm x 1.83m x 16m)



SLIP RESISTANCE



MALLEE WHEAT

LRV: 42.82

5A503911



GUNNAMATTA GREEN

LRV: 33.18

5A503551



SORRENTO BLUE

LRV: 17.72

5A503791



BONDI SAND

LRV: 57.55


5A503741



JERVIS GREEN

LRV: 30.44


5A503541

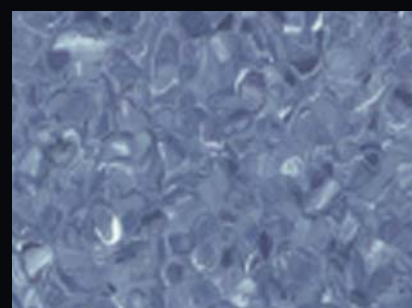

BELLS BLUE

LRV: 24.46

5A503491

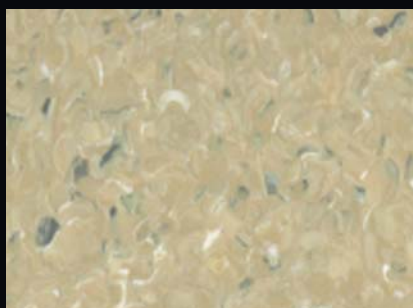

CAPRICORN BEIGE

LRV: 46.09

5A503731



HUON PINE

LRV: 38.42


5A503031



MASLIN BLUE

LRV: 34.56

5A503981

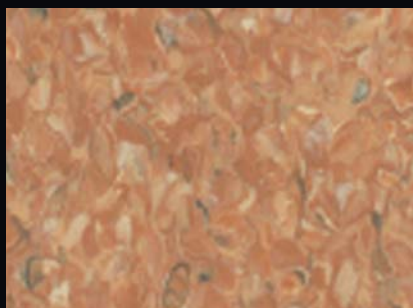

CARNARVON RED

LRV: 29.85

5A503801



MOSSMAN

LRV: 27.11

5A503021



MOUNTAIN BLUE

LRV: 25.18

5A503961

ACCOLADE PLUS

(2mm x 1.83m x 16m)



SOVEREIGN GOLD

LRV: 56

5A503061



TANAMI

LRV: 40.29

5A503071



FLAMETREE

LRV: 15.42

5A503991



RIVERINA PLUM

LRV: 12.65

5A503971



BLUE LAKE

LRV: 15.51

5A503951



TURQUOISE BAY

LRV: 14.19

5A503051

ACCOLADE FOOTHOLD

(2mm x 1.83m x 16m)



SOVEREIGN GOLD

LRV: 56

5A523061



TANAMI

LRV: 40.29

5A523071



FLAMETREE

LRV: 15.42

5A523991



RIVERINA PLUM

LRV: 12.65

5A523971



BLUE LAKE

LRV: 15.51

5A523951



TURQUOISE BAY

LRV: 14.19

5A523051

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



Armstrong Flooring's Infinity system allows you to pick any existing Accolade product and add up to two chip colours to create your own unique visual*.

Accolade




Colour Chips



53313
PMS: Warm Gray 5 C

53314
PMS: Cool Gray 10 C

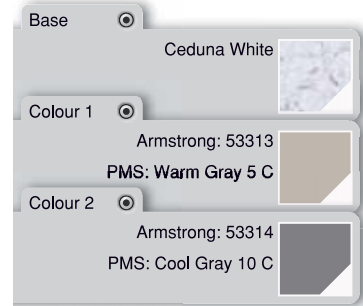

Accolade Base Colour: Ceduna White

Customised Infinity Design

*Minimum order quantities apply. Contact your Sales Representative or call 1800 632 624 for more information.



Royal Children's Hospital, Melbourne



ACCOLADE Foothold

(2mm x 1.83m x 16m)




P4*

B*

R11*

SLIP RESISTANCE

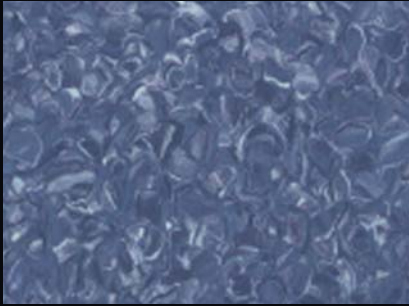

SORRENTO BLUE
LRV: 17.72

5A523791




GUNNAMATTA GREEN
LRV: 33.18

5A523551



MALLEE WHEAT
LRV: 42.82

5A523911

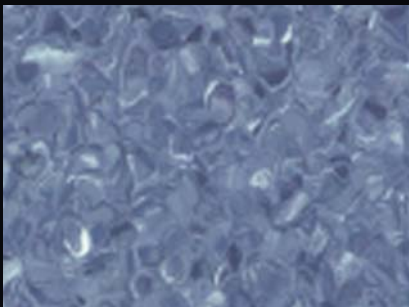

BELLS BLUE
LRV: 24.46

5A523491



JERVIS GREEN
LRV: 30.44

5A523541



BONDI SAND
LRV: 57.55

5A523741




MASLIN BLUE
LRV: 34.56

5A523981



HUON PINE
LRV: 38.42

5A523031

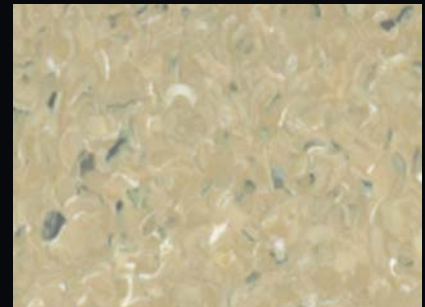

CAPRICORN BEIGE
LRV: 46.09

5A523731



MOUNTAIN BLUE
LRV: 25.18

5A523961



MOSSMAN
LRV: 27.11

5A523021



CARNARVON RED
LRV: 29.85

5A523801

ACCOLADE Foothold



P4*

B*

R11*

SLIP RESISTANCE



(2mm x 1.83m x 16m)



SPICE WHITE
LRV: 69.04

5A523561



CAPPUCCINO
LRV: 44.19

5A523571



IRONBARK
LRV: 22.98

5A523611



WHITEHAVEN
LRV: 63.83

5A523771



DARLING GREY
LRV: 36.05

5A523721



HAY PLAINS
LRV: 24.68

5A523921



CEDUNA WHITE
LRV: 64.61

5A523011



MURRAY CLAY
LRV: 30.19

5A523711



SAND GREY
LRV: 26.34

5A523151




CAMDEN GREY
LRV: 39.56

5A523941



MINTARO SLATE
LRV: 23.37

5A523931

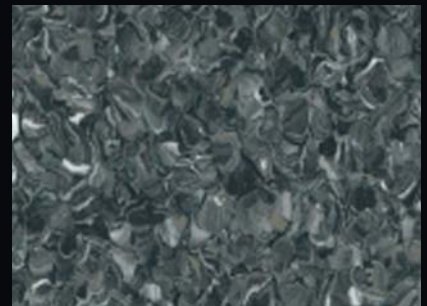

BLACK OPAL
LRV: 15.98

5A523621

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

ACCOLADE SAFE

(2mm x 1.83m x 16m)

P4*

B*

R10*

SLIP RESISTANCE



IRONBARK
LRV: 22.98

5A513611



MALLEE WHEAT
LRV: 42.82

5A513911



CARNARVON RED
LRV: 29.85

5A513801



CAPPUCCINO
LRV: 44.19

5A513571



CAPRICORN BEIGE
LRV: 46.09

5A513731



JERVIS GREEN
LRV: 30.44

5A513541




DARLING GREY
LRV: 36.05

5A513721




MURRAY CLAY
LRV: 30.19

5A513711

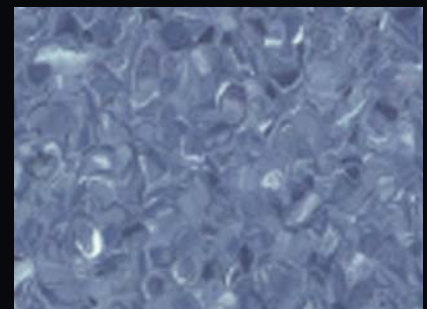

BELLS BLUE
LRV: 24.46

5A513491

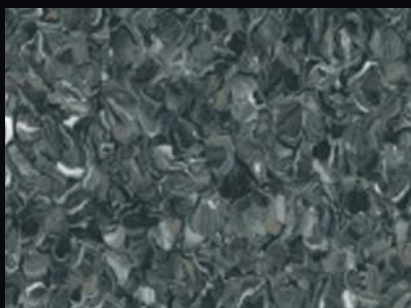

BLACK OPAL
LRV: 15.98

5A513621



SAND GREY
LRV: 26.34

5A513151



CAMDEN GREY
LRV: 39.56

5A513941


Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

WALLFLEX

(2mm x 1.5m x 20m)




All Wallflex colours now available as 2.0mm




NEUTRAL WHITE
LRV: 77.10

6W608229




COOL WHITE
LRV: 78.89

6W608249




DOVE WHITE
LRV: 74.75

6W608079




ALABASTER
LRV: 79.05

6W608469




LINEN
LRV: 70.94

6W608289




ICE WHITE
LRV: 80.00

6W608189




BLUE GREY
LRV: 63.01

6W608219




ALOE
LRV: 65.05

6W608309



MUSHROOM
LRV: 65.01

6W608269



PARADISE
LRV: 56.51

6W608299



Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



Lady Cilento Children's Hospital, Brisbane

 **INFINITY**
CUSTOM





Infinity Custom allows you to create your own customised flooring and walling products based on our Accolade and Wallflex formulations*



*Minimum order quantities apply. Contact your Sales Representative or call 1800 632 624 for more information.









Lady Cilento Children's Hospital, Brisbane




	ACCOLADE PLUS	ACCOLADE FOOHOLD	ACCOLADE SAFE	WALLFLEX
Practical	<ul style="list-style-type: none"> Exclusive homogeneous formulation including replenishing polyurethane throughout the thickness of the floor. Protective polyurethane finish reduces initial and ongoing maintenance and increases scuff resistance. 	<ul style="list-style-type: none"> Polyurethane reinforced surface featuring PUR² technology to aid maintenance and provide additional resistance against staining. Exclusive homogeneous formulation including replenishing polyurethane throughout the thickness of the floor. Colours mix and match with Accolade Safe & Accolade Plus. 	<ul style="list-style-type: none"> Offers supreme safety without the impregnated silicon chips of conventional non-slip resistant flooring that can attract and hold dirt, increasing maintenance and wear and tear on cleaning equipment. Unique construction with highly accented jaspe (multi-colour chip) visual helps mask dirt and wear patterns. 	<ul style="list-style-type: none"> Polyurethane coating aids maintenance. Clean, simple design for an uncomplicated look or the addition of a frieze if desired. 1.5 metre width ideal dado height for ease of installation. 2.0mm to align with floor vinyl.
Durable	<ul style="list-style-type: none"> Homogeneous construction for excellent dent and gouge resistance. The embossed surface texture and highly accented jaspe (multi-colour chip) visual help hide dirt and wear patterns created in high traffic conditions. 	<ul style="list-style-type: none"> Combination of embossed surface, aluminium oxide and polyurethane provides added slip resistance and protects long term appearance. Homogeneous construction for excellent durability and indentation resistance. 	<ul style="list-style-type: none"> The embossed surface reduces aquaplaning, while aiding slip resistance. 	<ul style="list-style-type: none"> Polyurethane coating reduces maintenance costs and protects long term appearance. Homogeneous construction for excellent dent and gouge resistance. 2.0mm thick for improved indent resistance.
Applications	<ul style="list-style-type: none"> Hospital Aged Care Health Care Education Light Industrial Mercantile Hospitality 	Recommended for wet barefoot areas of <ul style="list-style-type: none"> Hospital Aged Care Health Care Education 	<ul style="list-style-type: none"> Hospital Aged Care Health Care Education Light Industrial Mercantile Hospitality 	<ul style="list-style-type: none"> Hospital Aged Care Health Care Education Light Industrial Mercantile Hospitality

PLEASE NOTE: Recommendations are for guidance only, refer to relevant local, state and federal construction codes and standards for requirements

TECHNICAL DATA		ACCOLADE PLUS	ACCOLADE FOOHOLD	ACCOLADE SAFE	WALLFLEX
Type of floor covering/wall covering	ISO 10581	Homogeneous sheet vinyl	Homogeneous sheet vinyl	Homogeneous sheet vinyl	Homogeneous sheet vinyl
Manufactured in		Australia	Australia	Australia	Australia
Overall Thickness	ISO 24346	2.0mm	2.0mm	2.0mm	2.0mm
Wear Layer thickness	ISO 24340	2.0mm	2.0mm	2.0mm	2.0mm
Roll dimensions	ISO 24341	1.83m x 16m	1.83m x 16m	1.83m x 16m	1.5m x 20m
Polyurethane Reinforced		Yes PUR	Yes PUR	No	Yes PUR
Binder Content	ISO 10581	Type 1	Type 1	Type 1	Type 2
Wear resistance	EN 660-2	Group T	Group P	Group P	N/A
Slip Resistance	AS 4586				
Appendix A: Wet pendulum		P3*	P4	P4*	N/A
Appendix C: Wet/barefoot			B*	B*	
Appendix D: Oil-wet		R10*	R11*	R10*	
Fire Resistance (Flooring)	ISO 9239-1				
Critical Radiant Flux		≥8kW/m ²	≥8kW/m ²	≥8kW/m ²	N/A
Smoke Development Rate		≤750%. minutes	≤750%. minutes	≤750%. minutes	
Fire Resistance (Walling)	AS/NZS 3837				
Cone Calorimeter		Group 3	Group 3	Group 3	Group 1
Average specific extinction area		<250m ² /kg	<250m ² /kg	<250m ² /kg	<250m ² /kg
Classification (Use Area)	ISO 10874	Commercial: 34  Light Industrial: 43 	Commercial: 34  Light Industrial: 43 	Commercial: 34  Light Industrial: 43 	N/A


PLEASE NOTE: For Infinity & Infinity Custom minimum order quantities apply. Contact your Sales Representative or call 1800 632 624 for more information.

*For details refer to individual third party certificates.



Visit www.armstrongflooring.com.au or contact Customer Service 1800 632 624 for technical data, installation, cleaning and maintenance instructions.

Contact:



Armstrong Flooring Pty Ltd
29 – 39 Mills Road, Braeside, 3195 Victoria Australia

For further information and samples:
Australia Freecall 1800 632 624
Email customer_services@armstrongflooring.com or contact us on the web

www.armstrongflooring.com.au